

International Conference

“The prospects for introduction of “green” innovative energy efficiency technologies in the electric power industry of Turkmenistan”

SEIT building, 62 Bayram Khan st, Mary, 19 March 2024

**International experience in certification of passive public buildings.
Types of green certificates. Methods and basic criteria for certification**

Agris Kamenders,
International Consultant, SECCA

Agenda

Examples of certification of two public buildings:

1. Passive house
2. BREEAM
3. New requirements and trends



Source: renovation-hub.eu

Passive house certification



Certified Passive House Building



EnerPHit Retrofits

The EnerPHit certification serves as a proof of the specific values achieved for buildings that have either been consistently refurbished using **Passive House components** or **achieve a specific heating/cooling demand of 15kWh/m²a.**



Funded by
the European Union

Boarding Elementary school dormitory



Special Boarding Elementary school dormitory used to be inefficient soviet-era building that now meets **EnerPHit requirements**.

Treated Floor Area according to PHPP: 2191 m²

Construction type: masonry construction

The heating energy consumption in this building was reduced about **8 times from 185 kWh/(m²a) to 23 kWh/(m²a)**.

Air tightness: $n_{50} = 0.91/\text{h}$ press test result

Annual heating demand: 23 kWh/(m²a) calculated according to PHPP

Heating load 20 W/m²

PE demand (non-renewable Primary Energy) 65 kWh/(m²a) on heating installation, domestic hot water, household electricity and auxiliary electricity calculated according to PHPP

Thermal envelope

Exterior wall:

Existing masonry walls [0,87 W/(mK)] insulated with 400mm mineral wool [0,037 W/(mK)] in the timber frame structure [9%], covered with wind mineral wool boards [0,037 W/(mK)], facades covered with rear-ventilated composite panels. U-value = 0.091 W/(m²K)



Solution with timber frame structure, covered with wind mineral wool boards

Basement floor / floor slab:

220mm concrete floor slab with existing 100mm ceramsite layer [0,16 W/(mK)] U-value = 0.903 W/(m²K)

Roof:

Upper floor 220mm concrete ceiling insulated with 600mm cellulose [0,041 W/(mK)], U-value = 0.067 W/(m²K)

Frame: Rehau, Geneo

U_f-value 0.86 W/(m²K)

U_w-value = 0.76 W/(m²K)

Glazing: Triple-pane with argon filling

U_g-value = 0.5 W/(m²K)

g-value = 49 %

Entrance door: Insulated PVC exterior door

U_d-value = 0.9 W/(m²K)



Funded by
the European Union



Mechanical systems

Ventilation:

PAUL Wärmerückgewinnung GmbH, novus 450
Heat recovery unit, additional Paul Maxi 2002 and
Santos 570 eff. specif. HRE: 86%

Heating and hot water systems:

Ground Source Heat pump, radiators

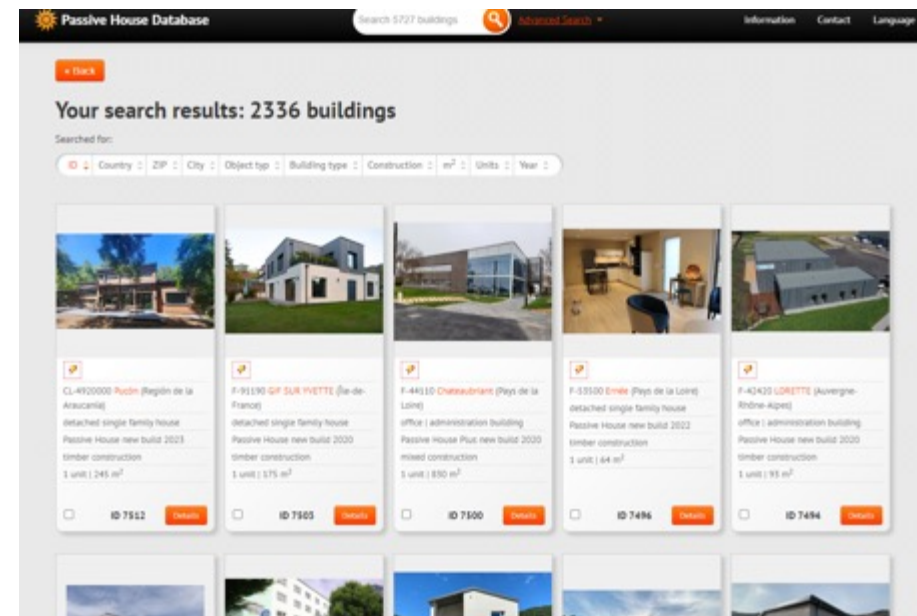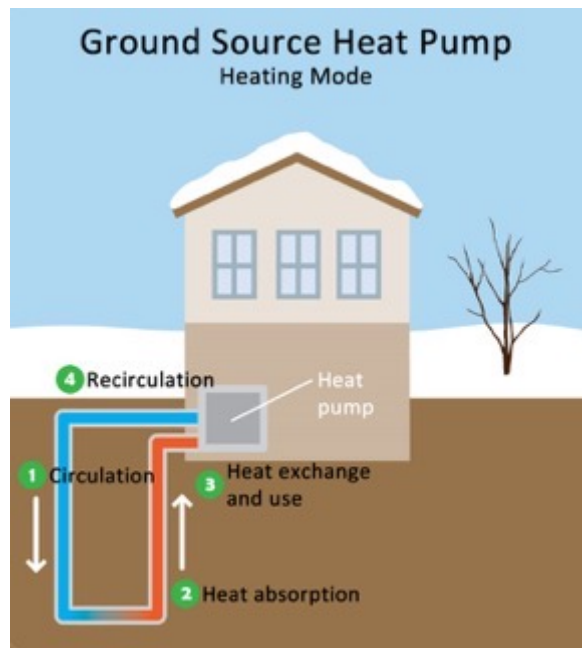

<https://passivehouse-database.org>



Funded by
the European Union

BREEAM building database

Explore BREEAM

EXPLORE THE DATA BEHIND BREEAM PROJECTS

Explore Assessors/APs Certified Assessments Maps Data Data Lab

Certified Assessments



CERTIFIED BREEAM ASSESSMENTS

This section provides a listing of the BREEAM Assessments that have been certified under BREEAM 2006 onwards - excepting a small number of buildings which cannot be listed for client confidentiality reasons. It also includes assessments certified by National Scheme Operators under BREEAM affiliated schemes.

Project Phase All

Project Type All

ADVANCED SEARCH

SEARCH

Results 1 - 20 of 37710

Results per page 20

Building / Asset Name	Client / Developer	Scheme	Rating Score	Stage/ Valid Until	Certificate No.	Assessor/Auditor	Town Postcode/Zipcode	Country
More...	DEAS Asset Management	In-Use International Commercial V6 Part 1 - Asset Performance	Very good 58.7%	14 Dec 2026	BIU00015788-1.0	CBRE AS	Oslo 0166	Norway
More...	Olav Vs gate 5 AS	In-Use International Commercial V6 Part 1 - Asset Performance	Very good 56.3%	27 Feb 2027	BIU00009695-1.0	Multiconsult Norge AS	Oslo 0161	Norway
More...	Aberdeen Standard Investments	In-Use International Commercial V6 Part 1 - Asset Performance	Good 40.0%	19 Dec 2026	BIU00016499-1.0	CBRE AS	Oslo 0250	Norway
More...	Billingsley Company	In-Use USA Commercial V6 Part 1	Pass 33.9%	14 Sep 2026	BIU00015025-1.0	Jordan & Skala Engineers, Inc	Piano 75093-8201	United States




<https://tools.breeam.com/>


Ogre city central Library

Sustainable technologies used


- **Rainwater:** An excellent, biologically active resource for automatic green wall irrigation.
- **Primary energy efficiency** in buildings includes heat pump and renewable energy technologies (solar PV).
- **Heat pump for energy**, significantly more efficient than standard solutions, supporting ventilation heating and hot water preparation. Water-to-air heat pump linked with the city's sewage, maintaining 12-18°C for higher operational efficiency. This system supports heating, cooling, and summer freecooling mode.
- Building Management System (BMS) - display in the building to show heat exchange data, symbolizing the gained energy.
- **Experimental solar panel** placement in the courtyard allows parking space below, maximizing sun exposure without affecting the building's aesthetics.
- **Ensuring air tightness** in passive building constructions concept

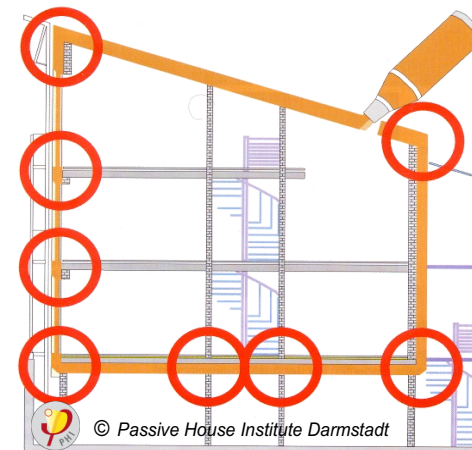

Ogre city central Library – shading using nature based solutions

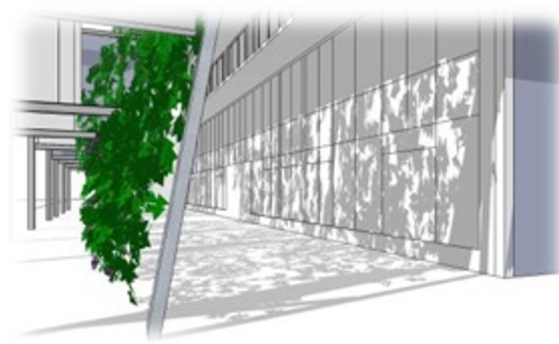

- West side features automatic blinds. East side uses **climbing plants on the facade to reduce solar impact**.
- Plants act as a passive solution: providing shade in summer and allowing solar warmth in winter.
- Emphasizes the importance of sharing experiences among Latvian low-energy building designers, highlighting both successes and areas for improvement.

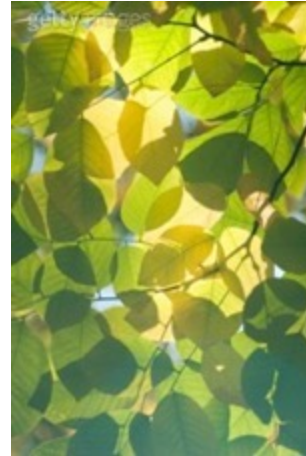


Smart lighting adjusts brightness based on room depth and proximity to windows.






- **South-facing large glass facade** designed for unobstructed outdoor views.
- To prevent overheating, initially considered installing blinds, but **extensive overhangs** were chosen as a better solution.

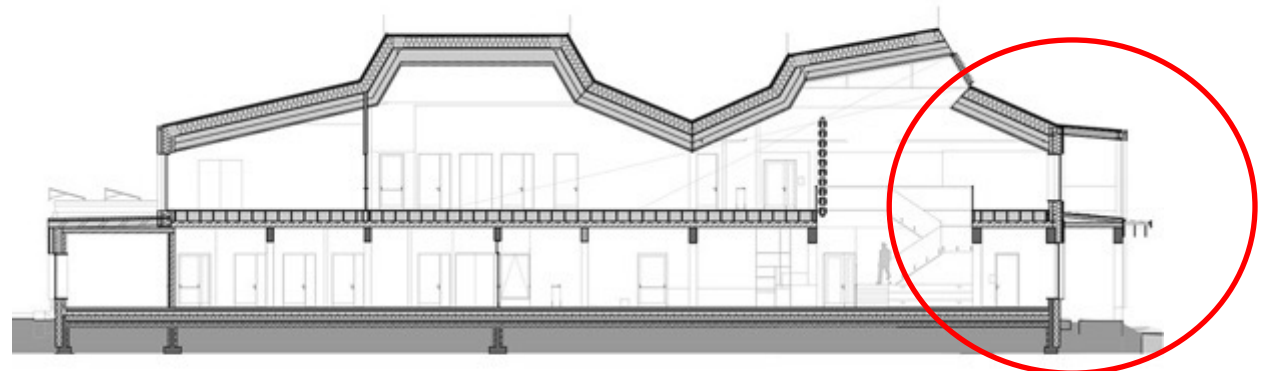


Funded by
the European Union

Ogre city central Library



- CO₂ sensors control ventilation based on occupancy, ensuring optimal air quality.

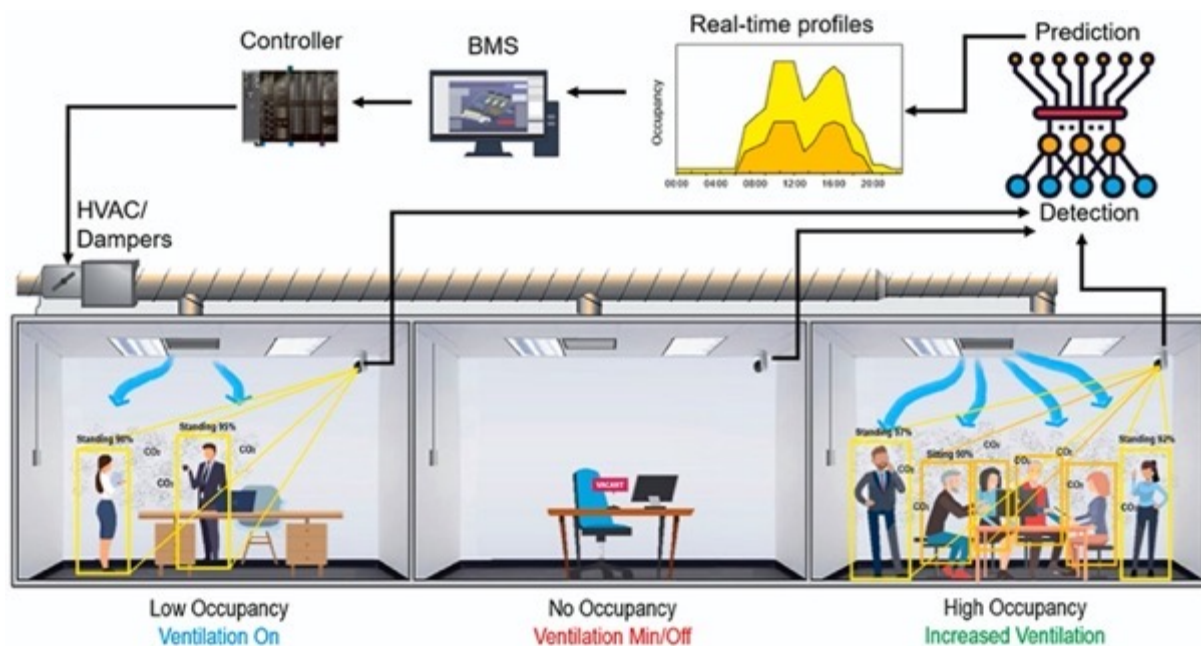

Good thermal insulation and thermal bridge free construction

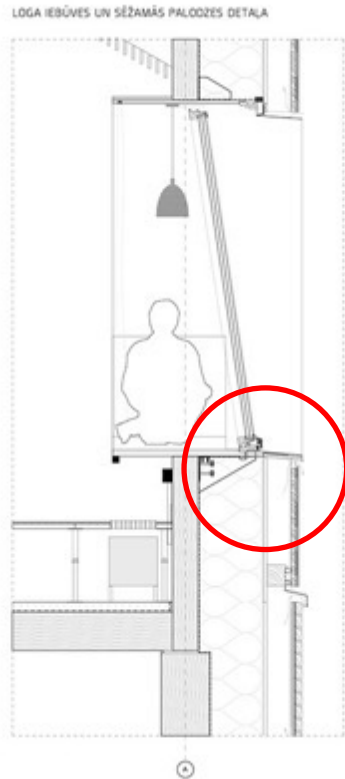


- Proper window placement in insulation & well-insulated frame $\rightarrow \Psi_{\text{installation}} < 0 \text{ W/(mK)}$.
- Extended frame insulation improves thermal performance.
- Incorrect installation $\rightarrow \Psi_{\text{installation}} > 0.05 \text{ W/(mK)}$.
- U-value deteriorates significantly with higher $\Psi_{\text{installation}}$.
- Thermal bridge effect varies with window position in wall/insulation

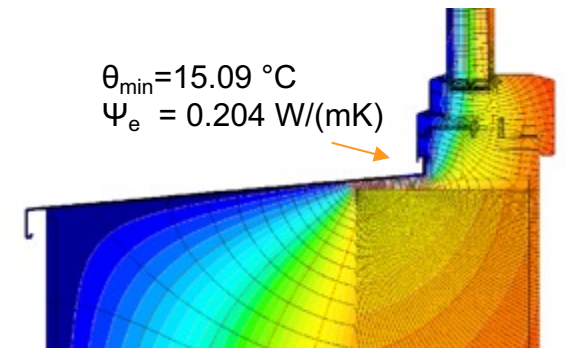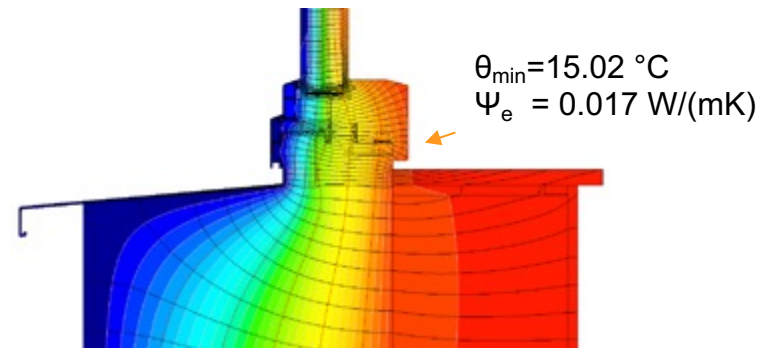

EU legislative requirements

- SRI – Smart Readiness Indicators
- Energy Performance certificates and minimum energy efficiency requirements
- CO₂ life cycle perspective

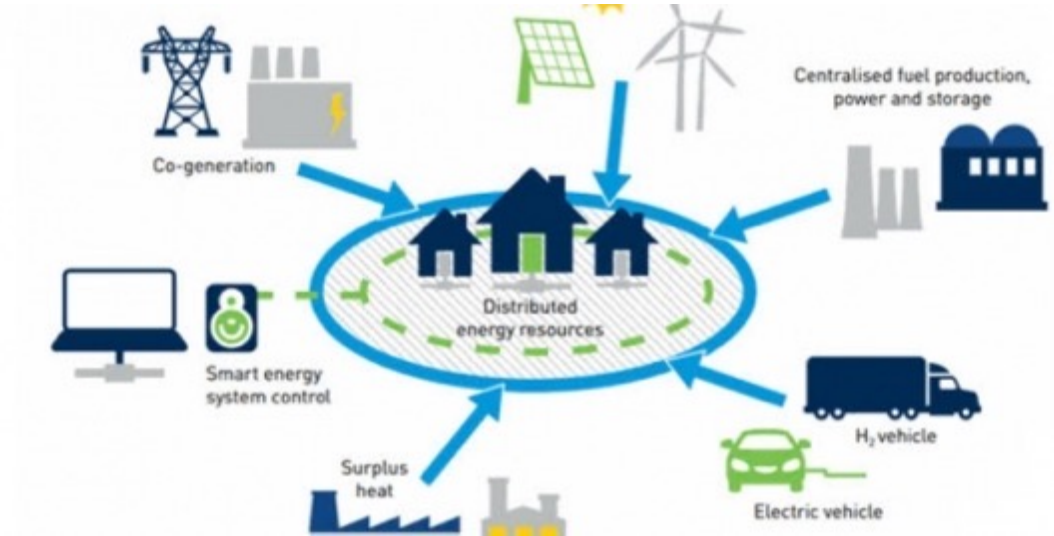

Funded by
the European Union

Smart Readiness Indicators

In a nutshell

What?

Assessment of a building's capacity to accommodate smart ready services

Why?

Raise awareness about the **added value of building smartness**, stimulate investment, support technology uptake

Who?

EU Member States (currently **optional, mandatory from 2026** for some building types)

How?

Structured methodology from the EC, **customisable** to the local context


So far?

7 EU countries – Denmark, Austria, France, Finland, Czech Republic, Croatia, Spain (enters the test phase soon)




Funded by
the European Union

History of the SRI

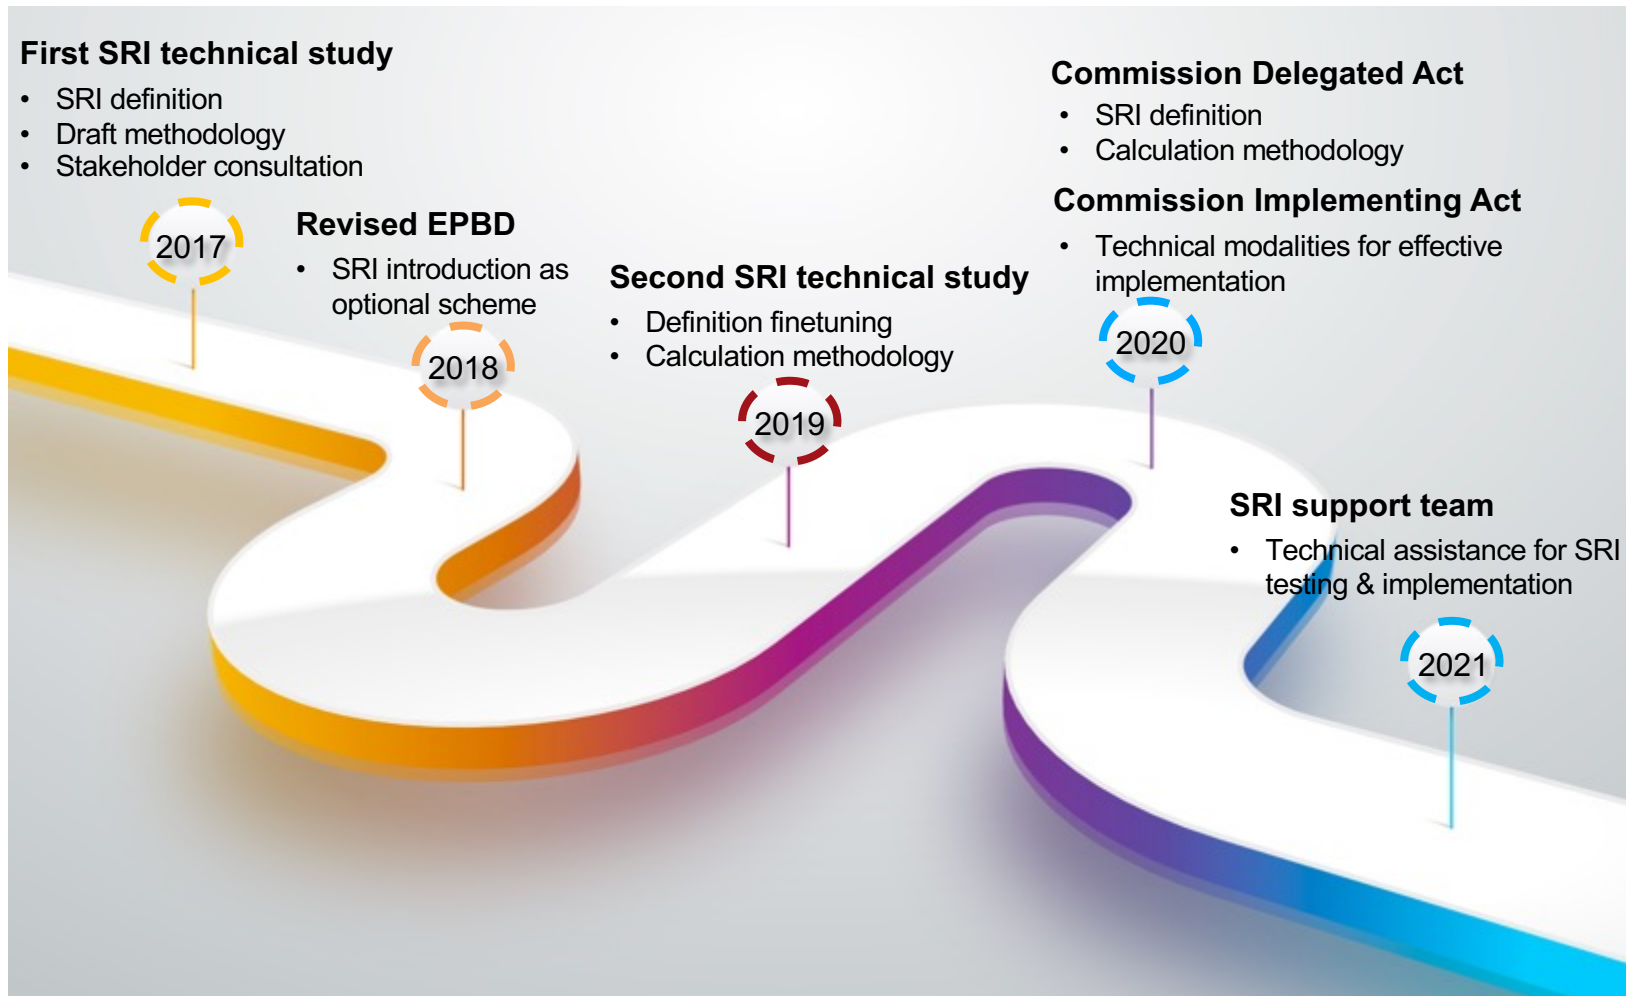


Funded by
the European Union



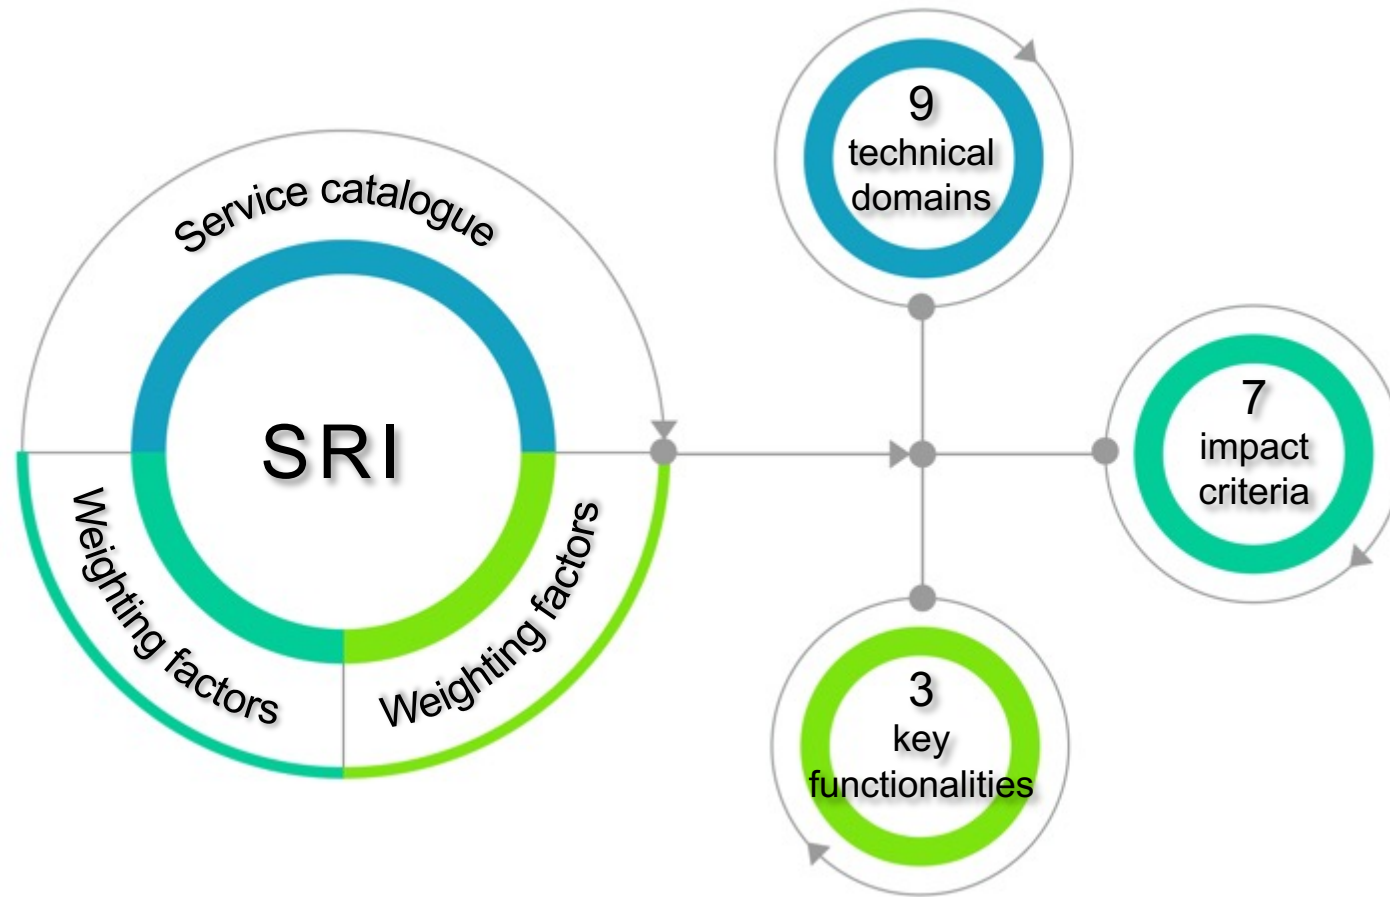

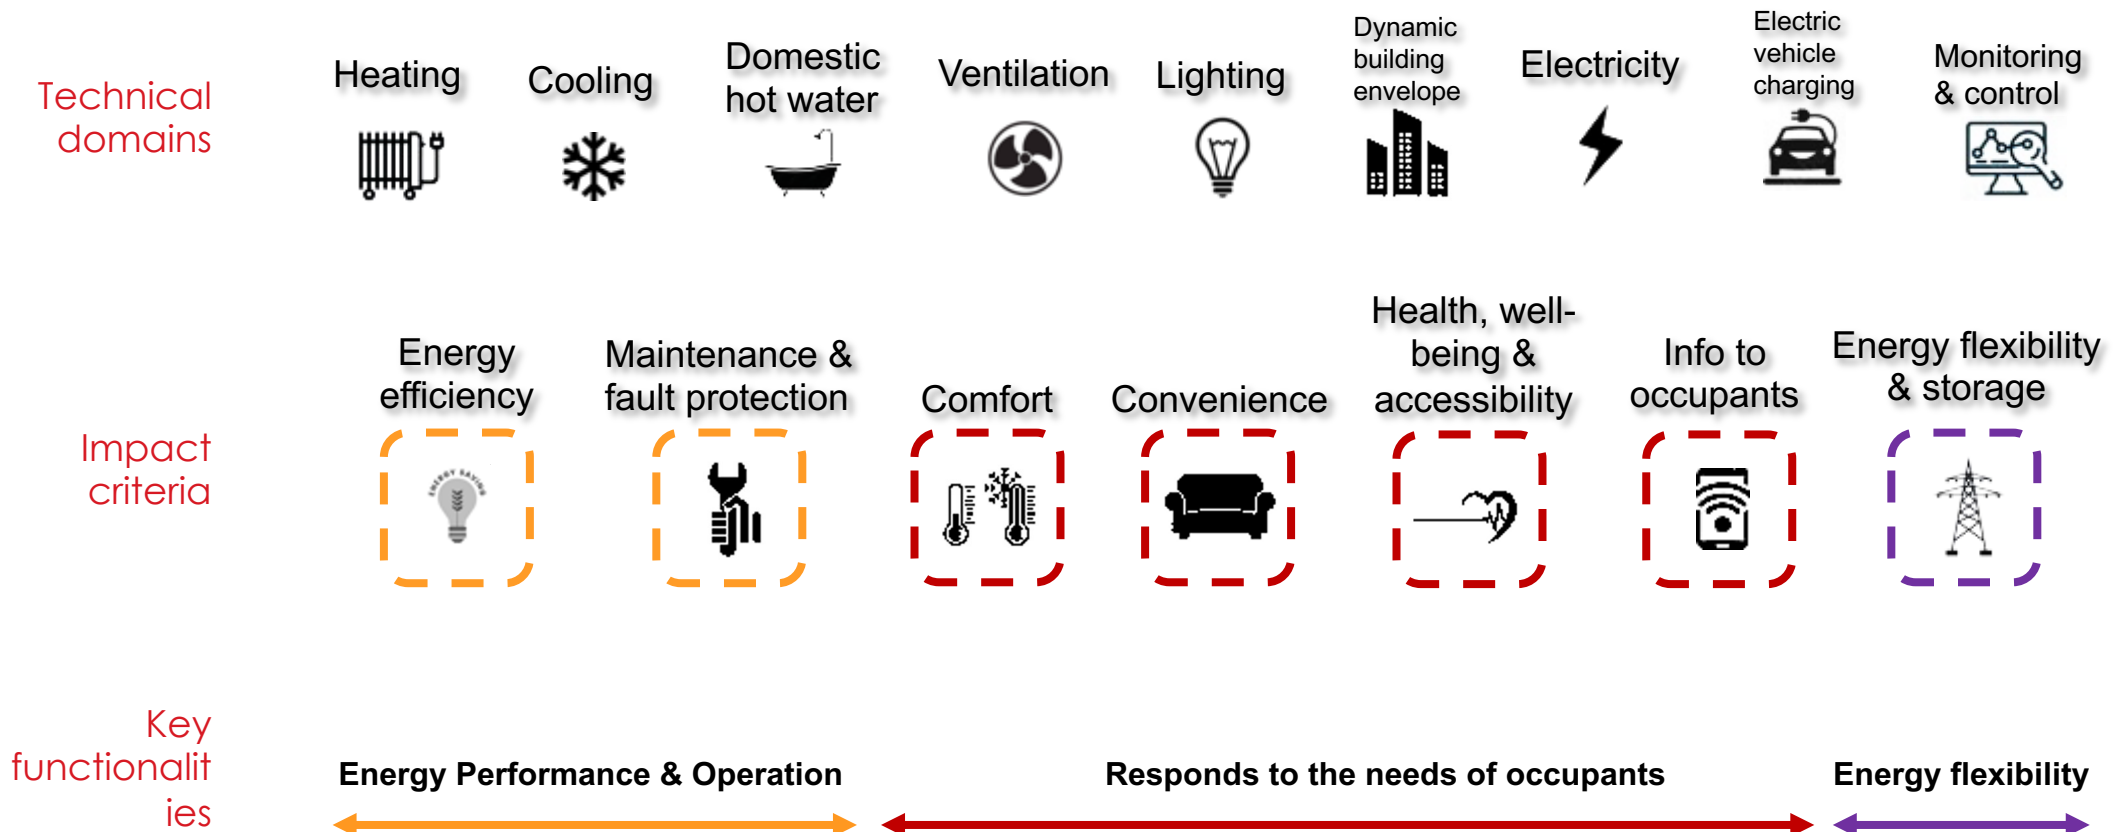


SRI features












Overall



Weighting Methods (1/2)

Key functionalities	1/3		1/3				1/3
	Energy performance & operation		Responds to the needs of occupants				Energy flexibility
Impact criteria	1/2	1/2	1/4	1/4	1/4	1/4	1/1
							
	Energy efficiency	Maintenance & fault protection	Comfort	Convenience	Health, well-being & accessibility	Info to occupants	Energy flexibility & storage

Weighting Methods (2/2)

		Energy performance & operation		Responds to the needs of occupants				Energy flexibility
Key functionalities								
Impact criteria								
Technical domains		Energy efficiency	Maintenance & fault protection	Comfort	Convenience	Health, well-being & accessibility	Info to occupants	Energy flexibility & storage
	Heating	%	%	16%	10%	20%	11.4%	%
	Cooling	%	%	16%	10%	20%	11.4%	%
	Domestic Hot Water	%	%		10%		11.4%	%
	Ventilation	%	%	16%	10%	20%	11.4%	%
	Lighting	%	%	16%	10%	20%		%
	Electricity	%	%		10%		11.4%	%
	Dynamic Building Envelope	5%	5%	16%	10%	20%	11.4%	
	Electric Vehicle Charging				10%		11.4%	5%
	Monitoring & Control	20%	20%	20%	20%		20%	20%
Sum of weights		100%	100%	100%	100%	100%	100%	100%

Step 1:
Fixed weights

Step 2:
Equal weights

Step 3:
Energy balance
(depending on climate
zone & type of building)

Climate zones	Countries
Northern Europe	Finland, Sweden , Denmark
Western Europe	UK, Ireland, Germany , Austria, France, Belgium, Luxembourg, The Netherlands
Southern Europe	Portugal, Spain, Cyprus, Malta, Italy , Greece
North-Eastern Europe	Estonia, Latvia, Lithuania, Poland , Slovakia, Czech Republic
South-Eastern Europe	Slovenia, Croatia, Hungary, Bulgaria, Romania

5 climate zones

(Northern Europe, Western Europe, Southern Europe, North-Eastern Europe, South-Eastern Europe)



6 building types

(single-family houses, small multi-family houses, large multi-family buildings, offices, wholesale and retail buildings, and educational buildings)



Funded by
the European Union

Examples

THE BUILDING:

Building type Non-residential (office building)

Location Bettembourg, Luxembourg

Surface area 2200 m²

Construction year 2014

Specificities The NeoBuild building is a pilot project for environmental performance and renewable energy production. It allows testing novel technologies, materials and building components



MAIN TECHNICAL CHARACTERISTICS:

EPC*
class A

Heat pumps
(ground to water &
air to air)

Solar panels (thermal
& PV) on the roof and
on several sides

Energy
storage on
site

No active
cooling



Funded by
the European Union








HOW THE SRI WAS ASSESSED:

Assessment carried out by LIST. Use of the detailed service catalogue available in the SRI assessment package (available on request at <https://ec.europa.eu/eusurvey/runner/SRI-assessment-package>).










OUTCOMES OF THE SRI ASSESSMENT:

Overall SRI score: **67%**

Scores per impact criteria:


Energy efficiency		81%
Maintenance and fault prediction		52%
Comfort		75%
Convenience		61%
Health, well-being and accessibility		62%
Information to occupants		59%
Energy flexibility and storage		68%

Scores per technical domains:

Heating		74%
Cooling		-
Domestic hot water		57%
Ventilation		60%
Lighting		85%
Dynamic building envelope		45%
Electricity		43%
Electric vehicle charging		0%
Monitoring and control		60%



ASPECTS POSITIVELY IMPACTING THE EVALUATION:

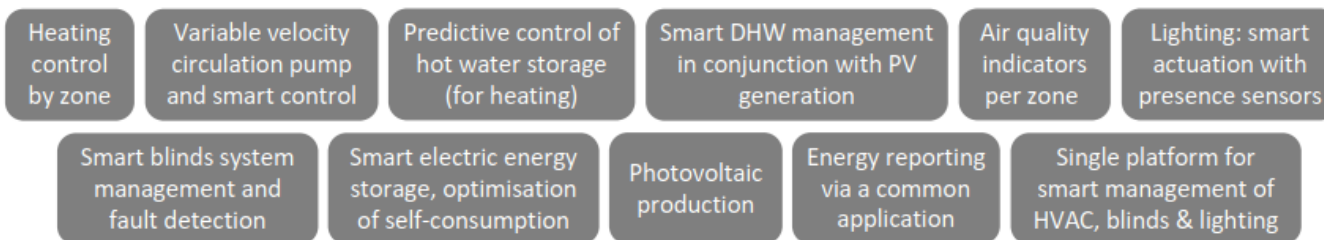


* DHW = domestic hot water

* HVAC = heating, ventilation and air conditioning

IMPROVEMENT POTENTIAL:

To increase the overall SRI score from **67%** to **91%** :

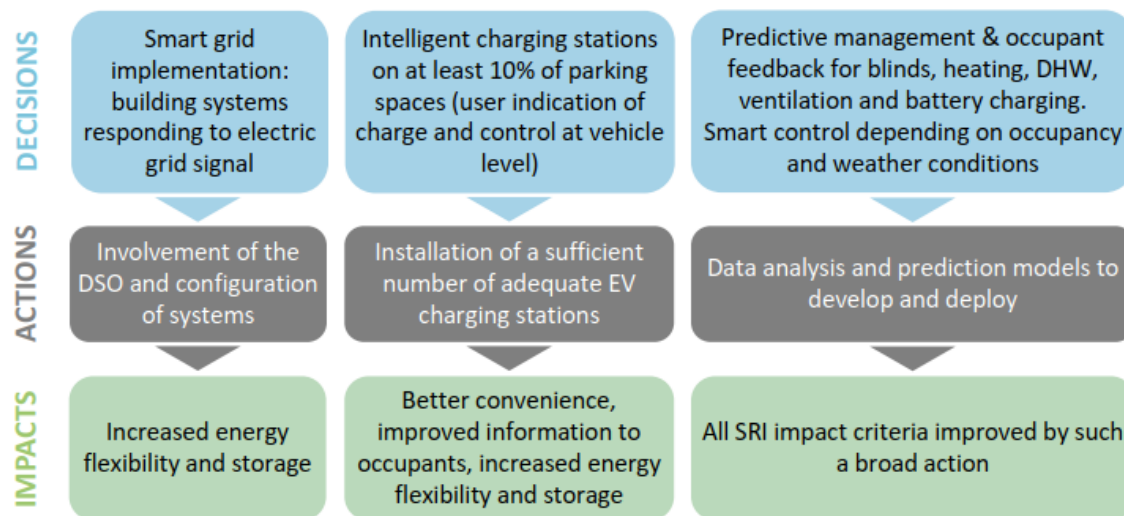

Funded by
the European Union

Smartness levels of services

Functionality levels of smart ready service A		Pre-defined scores (between 0-3) per smart ready service						
		Energy efficiency	Maintenance and fault protection	Comfort	Convenience	Health, well-being and accessibility	Information to occupants	Energy flexibility and storage
Level 0	Non-smart	[0-3]	[0-3]	[0-3]	[0-3]	[0-3]	[0-3]	[0-3]
Level 1	...	[0-3]	[0-3]	[0-3]	[0-3]	[0-3]	[0-3]	[0-3]
Level 2	...	[0-3]	[0-3]	[0-3]	[0-3]	[0-3]	[0-3]	[0-3]
Level 3	...	[0-3]	[0-3]	[0-3]	[0-3]	[0-3]	[0-3]	[0-3]
Level 4	Maximum smartness	[0-3]	[0-3]	[0-3]	[0-3]	[0-3]	[0-3]	[0-3]

Domain	Smart ready service	Functionality level 0	Functionality level 1	Functionality level 2	Functionality level 3	Functionality level 4
Heating	Heat emission control	No automatic control	Central automatic control	Individual room control	Individual room control with communication between controllers	Individual room control with communication and presence control



Implementation pathways

- Linkage of the **SRI to the EPC** so that an SRI assessment is triggered each time an EPC is about to be issued
- Linkage of the SRI to the construction of **new buildings and major renovations**
- **Market-based voluntary scheme** based on self-assessment and supported by on-line tools and 3rd party certified bodies for **those willing to pay**
- **Market-based voluntary scheme** based on self-assessment and supported by on-line tools and 3rd party certified bodies **subsidised by the state/utilities** in the context of promoting flexibility, energy efficiency, self-generation, etc.
- Linkage to the **Building Automation and Control Systems (BACS) and Technical Building Systems (TBS) deployment**, drawing from Articles 8, 14 and 15 of the EPBD
 - Article 8 provisions the installation, upgrade, and replacement of TBS and measures to encourage the deployment of automatic temperature regulation and zoning
 - Articles 14 (heating inspections) and 15 (cooling inspections) require all **non-residential buildings** with equivalent rated capacity for heating/cooling > 290 kW to have BACS by 2025
- Linkage to the **roll-out of smart meters**
- **Mix of the above** based on subsidies, financial instruments, etc.

